



**Alex Osuna  
Sandro De Santis**

# IBM System Storage N series Hardware Reference

## Introduction

In this IBM® Redpaper™ publication we include reference figures that are useful for selecting the needed hardware (HW) features before installing and configuring the systems. In particular, we provide figures of:

- ▶ N series appliance models with technical specifications
- ▶ N7000/6000/3000 series model rear views
- ▶ N series Gateway models with technical specifications
- ▶ Fibre Channel and Ethernet adapter cards summary
- ▶ Serial-attached SCSI (SAS) and special purposes adapter cards summary
- ▶ Disk drive summary
- ▶ Shelf enclosures and N3300 rear view

For updated information also refer to the following Web site and select the specific model to verify whether updates are available:

<http://www-03.ibm.com/systems/storage/network/>

<http://www-03.ibm.com/systems/storage/network/>

The information provided here is updated with the Data ONTAP® 8.0-7 mode release HW reference.

Figure 1 provides a quick summary of the capacity information for currently available IBM N series models (as appliance, with EXNx00 external shelves). You can check your environment's raw capacity needs and number of disk shelves. Check that the capacity provided is the raw one and not the possible user net capacity, which varies depending on your data-protection selection, snapshot criteria, advanced copy services enablement.

IBM N series appliance models (Axx)									
Model	N7900	N7700	N6070	N6060	N6040	N3600	N3400	N3300	
System Capacity Raw Max (2TB dr)	2352TB	1680TB	1680TB	1344TB	840TB	208TB	272TB	136TB	
Max Aggregate <sup>1</sup> (32-56 / 64-bit)	16TB / 100TB	16TB / 70TB	16TB / 70TB	16TB / 50TB	16TB / 40TB	16TB / -	16TB / 30TB	16TB <sup>5</sup> / -	
Max EXN3000 Shelves	49	35	35	28	17.5	4	4	-	
Max EXN-4000/1000 Shelves	84	60	60	48	30	6	8	4	
Max Drive Quantity	1176	840	840	672	420	104 (20 Int + 84 Ext)	136 (12 Int + 124 Ext)	68 (12 Int + 56 Ext)	
Environmental HA Pair/Single Controller	Height (HA/Single)	12U / 6U	12U / 6U	6U / 6U	6U / 6U	6U / 6U	4U / 4U	2U / 2U	
	Weight (HA/Single)	242 lb. (109.6 kg) 121 lb. (54.8 kg)	242 lb. (109.6 kg) 121 lb. (54.8 kg)	122 lb. (55.3 kg) 95 lb. (43.1 kg)	122 lb. (55.3 kg) 95 lb. (43.1 kg)	122 lb. (55.3 kg) 95 lb. (43.1 kg)	110 lb. (50 kg) with drives	66 lb. (29.9 kg) with drives	66 lb. (29.9 kg) with drives
	AC Power (HA only)	100-120V 11.2A 200-240V 5.6A	100-120V 10.8A 200-240V 5.6A	100-120V 8.1A 200-240V 4A	100-120V 7.7A 200-240V 4.3A	100-120V 5.9A 200-240V 2.9A	100-120V 5.7A 200-240V 2.9A	100-120V 4.6A 200-240V 2.3A	100-120V 4.1A 200-240V 2.2A
	Thermal <sup>3</sup> (HA/Single)	3,740 BTU/hr 1,870 BTU/hr	3,624 BTU/hr 1,812 BTU/hr	2,761 BTU/hr 1,602 BTU/hr	2,594 BTU/hr 1,502 BTU/hr	2,026 BTU/hr 1,272 BTU/hr	2,247 BTU/hr 1,988 BTU/hr	1,518 BTU/hr 1,279 BTU/hr	1,587 BTU/hr 1,298 BTU/hr
Platform Specifications HA Pair/Single Controller	Processor (HA/Single)	8 / 4 64-bit dual-core	4 / 2 64-bit	4 / 2 64-bit dual-core	4 / 2 64-bit dual-core	2 / 1 64-bit dual-core	2 / 1 32-bit	2 / 1 32-bit dual-core	2 / 1 32-bit
	Memory (HA/Single)	64GB / 32GB	32GB / 16GB	32GB / 16GB	16GB / 8GB	8GB / 4GB	4GB / 2GB	8GB / 4GB	2GB / 1GB
	NVRAM (HA/Single)	4GB / 2GB	1GB / 512MB	4GB / 2GB onboard	4GB / 2GB onboard	1GB / 512MB onboard	512MB / 256MB NVMEM	1GB / 512MB NVMEM	256MB / 128MB NVMEM
	PCI Slots (HA/Single)	10 / 5 (PCIe) 6 / 3 (PCI-X)	10 / 5 (PCIe) 6 / 3 (PCI-X)	8 / 4 (PCIe)	8 / 4 (PCIe)	8 / 4 (PCIe)	2 / 1 (PCIe)	-	-
	Ethernet (HA/Single)	12 / 6 GbE RJ45	12 / 6 GbE RJ45	4 / 2 GbE RJ45	4 / 2 GbE RJ45	4 / 2 GbE RJ45	4 / 2 GbE RJ45	8 / 4 GbE RJ45	4 / 2 GbE RJ45
	FC Ports (HA/Single)	16 / 8 4Gb SFP <sup>4</sup>	16 / 8 4Gb SFP <sup>4</sup>	8 / 4 4Gb SFP <sup>4</sup>	8 / 4 4Gb SFP <sup>4</sup>	8 / 4 4Gb SFP <sup>4</sup>	4 / 2 4Gb SFP <sup>4</sup>	4 / 2 4Gb SFP <sup>4</sup>	4 / 2 4Gb SFP <sup>4</sup>
	SAS Ports (HA/Single)	- / -	- / -	- / -	- / -	- / -	- / -	2 / 1 12Gb QSFP	- / -
	Data ONTAP <sup>6</sup> (Min Release)	7.2.4 / 8.0 /	7.2.4 / 8.0	7.2.5 / 8.0	7.2.6 / 7.3.1 / 8.0	7.2.5 / 8.0	7.2.2L1	7.3.2 / 8.0	7.2.2L1

**Notes**

<sup>1</sup> System capacity is calculated using base 10 arithmetic (i.e. 1TB=1,000,000,000,000 bytes) and is derived based on the type, size, and number of drives.

<sup>2</sup> Maximum volume/aggregate size is calculated using base 2 arithmetic (1TB = 2<sup>40</sup> bytes).

<sup>3</sup> The thermal dissipation values shown are based on typical system values at 100-120V input voltage. Please refer to the Site Requirements.

<sup>4</sup> Autosensing ports: 1, 2, 4Gb.

<sup>5</sup> Beginning with Data ONTAP 7.3.1, N3300 systems support aggregates up to 16TB raw capacity, provided that the root volume is hosted in a dedicated aggregate (no user data) or by maintaining two spare disks per controller.

**HA Pair Notes**

HA pair configuration means two controllers - both actively serving data - are connected for automatic failover protection. The interconnect options are applicable to HA pair configurations using NVRAM5 and NVRAM6 adapters.

NOTE: In order to achieve the maximum 500 meter distance between controllers in a HA pair, the interconnect cable must be a direct point-to-point connection with no intermediate device between them (such as patch panel).

HA configurations that must go through a patch panel can use specific part numbers in conjunction with the Cu-to-Op converters.

**Terms and Abbreviations**

<p>BTU – British Thermal Unit</p> <p>Cu – Copper Connector</p> <p>FC – Fibre Channel</p> <p>GbE – Gigabit Ethernet</p> <p>HA – High Availability (2 clustered nodes)</p> <p>NVRAM – Non-Volatile RAM</p>	<p>Op – Optical Connector</p> <p>PSU – Power Supply Unit</p> <p>SAS – Serial-attached SCSI</p> <p>SATA – Serial ATA</p> <p>SFP – Small Form-Factor Pluggable</p> <p>VAC – Volts Alternating Current</p>
--	---

Figure 1 N series appliance models summary

Also, additional information was added (such as the environmental and the controller internal characteristics) to make the reader aware of the needed elements when selecting the best system choice for his needs. Figure 1 can also be used for pre-installation activities when it is important to verify whether certain topics must be discussed (for example, space in the rack, available HBA slots, power requirements).

Figure 2 shows the rear view of the currently available N7000, N6000, and N3000 models (N3400 is shown in Figure 8 on page 8). The purpose is to make the reader aware of the essential components in the controller enclosures and the location of the expansion slots (if available) and the connection/management ports. In addition, dimensions are added (width x height x depth).

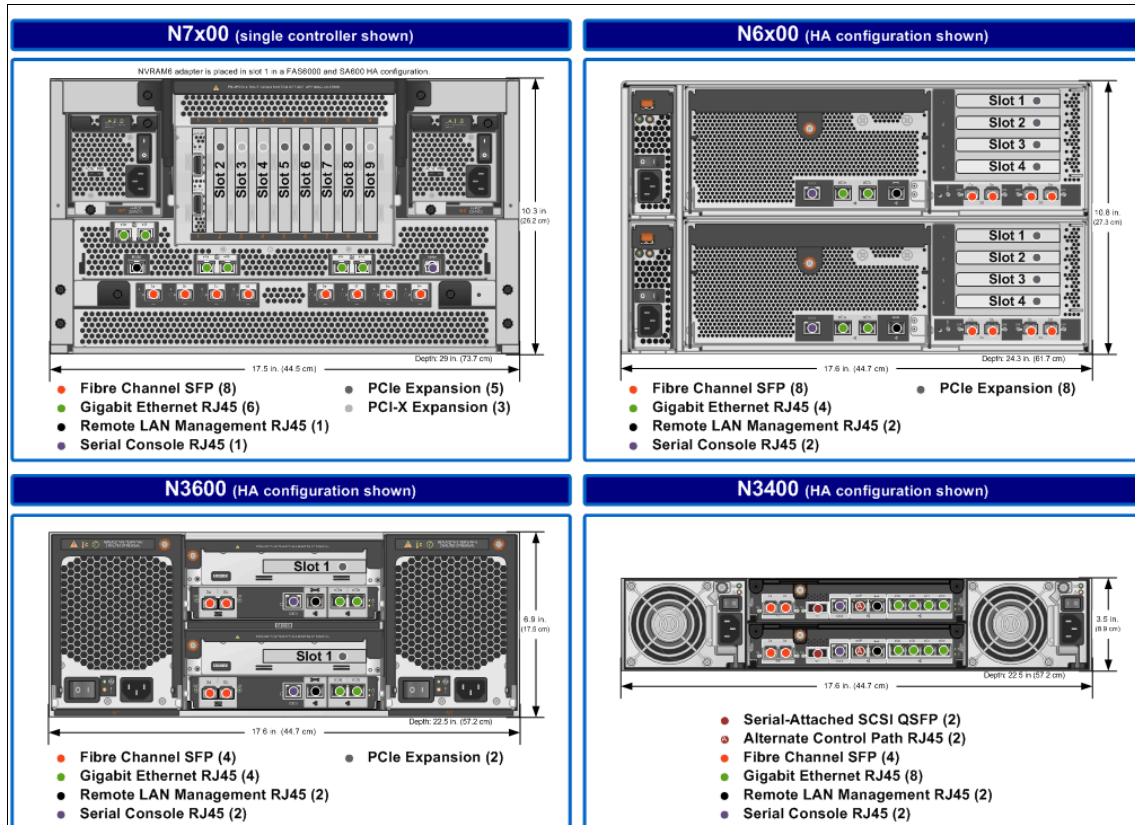


Figure 2 N series model rear views

Figure 3 on page 4 provides a quick summary of the capacity information for currently available IBM N series models (such as the gateway, when connected to external certified storage system or EXNx00 shelves). Additional information was added (such as the environmentals and the controller internal characteristics) to make the reader aware of the required elements when selecting the best system choice for his needs. Figure 3 on page 4 can also be used for pre-installation activities when it is important to verify whether certain topics must be discussed (for example, space in the rack, available HBAs, and power requirements).

		IBM N series Gateway				
Model	N7900	N7700	N6070	N6060	N6040	
System Capacity Raw Maximum <sup>1</sup>	1176TB	840TB	840TB	672TB	420TB	
Max Number of LUNs	1176	840	840	672	420	
V-Series Supported Arrays	EMC CLARION EMC Symmetrix Fujitsu ETERNUS Hitachi TagmaStore USP Hitachi Lightning Hitachi Thunder HP StorageWorks IBM TotalStorage 3Par InServ TMS RamSan  Note: Please check the IBM web site for details and the latest N series gateway support matrix.					
Environmental HA Pair/Single Controller	Height (HA/Single)	12U / 6U	12U / 6U	6U / 6U	6U / 6U	6U / 6U
	Weight (HA/Single)	242 lb. (109.6 kg) 121 lb. (54.8 kg)	242 lb. (109.6 kg) 121 lb. (54.8 kg)	122 lb. (55.3 kg) 95 lb. (43.1 kg)	122 lb. (55.3 kg) 95 lb. (43.1 kg)	122 lb. (55.3 kg) 95 lb. (43.1 kg)
	AC Power (HA only)	100-120V 11.1A 200-240V 5.8A	100-120V 22A 200-240V 10A	100-120V 8.1A 200-240V 4A	100-120V 7.7A 200-240V 4.3A	100-120V 5.9A 200-240V 2.9A
	Thermal <sup>2</sup> (HA/Single)	3,740 BTU/hr 1,870 BTU/hr	3,624 BTU/hr 1,812 BTU/hr	2,761 BTU/hr 1,602 BTU/hr	2,594 BTU/hr 1,502 BTU/hr	2,026 BTU/hr 1,272 BTU/hr
Platform Specifications HA Pair/Single Controller	Processor (HA/Single)	8 / 4 64-bit dual-core	4 / 2 64-bit	4 / 2 64-bit dual-core	4 / 2 64-bit dual-core	2 / 1 64-bit dual-core
	Memory (HA/Single)	64GB / 32GB	32GB / 16GB	32GB / 16GB	16GB / 8GB	8GB / 4GB
	NVRAM (HA/Single)	4GB / 2GB	1GB / 512MB	4GB / 2GB onboard	4GB / 2GB onboard	1GB / 512MB onboard
	PCI Slots (HA/Single)	10 / 5 (PCIe) 6 / 3 (PCI-X)	10 / 5 (PCIe) 6 / 3 (PCI-X)	8 / 4 (PCIe)	8 / 4 (PCIe)	8 / 4 (PCIe)
	Ethernet (HA/Single)	12 / 6 GbE RJ45	12 / 6 GbE RJ45	4 / 2 GbE RJ45	4 / 2 GbE RJ45	4 / 2 GbE RJ45
	FC Ports (HA/Single)	16 / 8 4Gb SFP <sup>3</sup>	16 / 8 4Gb SFP <sup>3</sup>	8 / 4 4Gb SFP <sup>3</sup>	8 / 4 4Gb SFP <sup>3</sup>	8 / 4 4Gb SFP <sup>3</sup>
	Data ONTAP <sup>6</sup> (Min Release)	7.2.4 / 8.0	7.2.4 / 8.0	7.2.5 / 8.0	7.2.6 / 7.3.1 / 8.0	7.2.5 / 8.0

**Notes**

<sup>1</sup> System capacity is calculated using base 10 arithmetic (i.e. 1TB = 1012 bytes) and is derived based on the type, size, and number of drives.

<sup>2</sup> The thermal dissipation values shown are based on typical system values at 100-120V input voltage.

<sup>3</sup> Autosensing ports: 1, 2, 4Gb.

<sup>4</sup> Max performance and capacity are calculated using base 10 arithmetic

<sup>5</sup> Assumes deduplication at 20:1.

<sup>6</sup> Assumes that deduplication is disabled and that data is compressible at 2:1.

**Terms and Abbreviations**

BTU – British Thermal Unit  
 Cu – Copper Connector  
 FC – Fibre Channel  
 GbE – Gigabit Ethernet  
 HA – High Availability  
 NVRAM – Non-Volatile RAM  
 LUN – Logical Unit Number  
 Op – Optical Connector  
 SFP – Small Form-Factor Pluggable  
 VAC – Volts Alternating Current

Figure 3 N series gateway models summary

Maximum capacity is still reported with 1 TB Serial Advanced Technology Attachment (SATA) drives reference. Specific external storage system certification data is not provided here. For that information refer to the interoperability site:

<http://www.ibm.com/systems/storage/network/interophome.html>

Figure 4 shows the currently available expansion/connection cards that you can order for both FC (internal and external) and IP connectivity. It is extremely important to be aware of the potential system expandability when you have the need to add more disk shelves or when connecting the systems to new servers (via LAN, SAN, or both). The reader can plan its upgrade checking where the new expansion HBAs can be added (PCIe or PCIx slots), avoiding unplanned conflicts due to having no more available slots.

	Feature Code	Media	Data ONTAP (min release)	N series Appliance						N series Gateway						
				7900	7700	6070	6060	6040	3600	7900	7700	6070	6060	6040		
FIBRE CHANNEL	PCIe	1017	FCP TARGET Dual Port 4Gb	Op - LC	7.2	4	4	2	2	2		4	4	2	2	2
		1030	FCP TARGET Quad Port 4Gb	Op - LC	7.3	4	4	4	4	4	1	4	4	4	4	4
		1036	FCP TARGET Dual Port 8Gb	Op - LC	7.3	4	4	4	4	4	1	4	4	4	4	4
		10156	DISK/TAPE Dual Port 4Gb	Op - LC	7.2 10.0.1	3	3	4	4	4	1	3	3	4	4	4
		1029	DISK Quad Port 4Gb	Op - LC	7.2.2	5	5	4	4	4	1	5	5	4	4	4
		1035	DISK/TAPE Quad Port 4Gb	Op - LC	7.2.3	5	5	4	4	4						
		1014	DISK Dual Port 4Gb	Op - LC	7.2 10.0.1	5	5	4	4	4	1	5	5	4	4	4
ETHERNET	PCIe	1022	TOE Quad Port GbE	Cu - RJ45	7.2.1	5	5	4	4	4		5	5	4	4	4
		1031	TOE Dual Port 10GbE	Op - LC	7.2.3 10.0.3	5	5	4	4	4		5	5	4	4	4
		1012	NIC Dual Port GbE	Op - LC	7.2	5	5	4	4	4	1	5	5	4	4	4
		1013	NIC Dual Port GbE	Cu - RJ45	7.2 10.0.1	5	5	4	4	4	1	5	5	4	4	4
		1023	NIC Quad Port GbE	Cu - RJ45	7.2.1 10.0.1	5	5	4	4	4	1	5	5	4	4	4
		1062	NIC Single Port 10GbE	Op - LC	7.3.2						1					
		1065	NIC Dual Port 10GbE	Op - LC	7.3.2	5	5	4	4	4		5	5	4	4	4
		1026	iSCSI Dual Port GbE	Cu - RJ45	7.2.1	5	5	4	4	4	1	5	5	4	4	4
		1021	iSCSI Dual Port GbE target	Op - LC	7.2.1	5	5	4	4	4	1	5	5	4	4	4
		1008	TOE Single Port 10GbE	Op - LC	7.2 10.0.1	2	2					2	2			
	1007	TOE Quad Port GbE	Cu - RJ45	7.2	2	2					2	2				
	1010	iSCSI Dual Port	Cu - RJ45	7.2	3	3					3	3				
	1011	iSCSI Dual Port	Op - LC	7.1.1	3	3					3	3				
	PCIx															

Please refer to the IBM configuration guidelines for proper platform and expansion slot assignment information.

Figure 4 N series FC and Ethernet adapter cards

See Figure 1 on page 2 and Figure 3 on page 4 for appliance or gateway compatibility.

Figure 5 shows the currently available expansion/connection cards for SAS/SCSI and specific features connectivity. It is extremely important to be aware of the potential system expandability when adding more disk shelves, when connecting the system to new servers (via LAN, SAN, or both), or when enabling new features. The reader can plan the upgrade by checking where the new expansion HBAs can be added (PCIe or PCIx slots).

	Feature Code	Media	Data ONTAP (min release)	N series appliance						N series Gateway					
				7900	7700	6070	6060	6040	3600	7900	7700	6070	6060	6040	
SAS / SCSI	PCIe	1024 TAPE Dual SCSI-LVD/SE	Cu - 68p VHDCI	7.2	3	3	4	4	4	1	3	3	4	4	4
		1060 SAS, 2-Port, 3Gb	Cu - miniSAS	7.3.2						1					
	1061 SAS, 4-Port, 3Gb	Cu - QSFP	7.3.2	5	5	4	4	4		5	5	4	4	4	
	PCIe	1016 TAPE Dual SCSI-LVD/SE	Cu - 68p VHDCI	7.0.5	3	3					3	3			
		1033 SnapMirror <sup>3</sup> /Fibre Channel 4Gb	Op - LC	7.2.2	2	2	1	1	1	1	2	2	1	1	1
		1063 CNA Dual-Port 10Gb FCoE	Op - LC	7.3.2	5	5	4	4	4	1	5	5	4	4	4
		10646 CNA Dual-Port 10Gb FCoE	Cu - SFP+	7.3.2	5	5	4	4	4	1	5	5	4	4	4
		1032 MetroCluster FC-VI 4Gb Dual	Op - LC	7.2.3	1	1	1	1	1		1	1	1	1	1
		1056 PAM Cache Card - 16GB	-	7.3	5	5	4	2	2		5	4	4	2	2
		1058 PAM II Cache Card - 256GB	-	7.3.2				2	1					2	1
1057 PAM II Cache Card - 512GB		-	7.3.2	4	2	2				4	2	2			
1034 SnapMirror <sup>3</sup> /Fibre Channel 2Gb	Op - LC	6.5	2	2											

Please refer to the IBM configuration guidelines for proper platform and expansion slot assignment information.

Not Supported     Supported (# = max per controller)

**Terms and Abbreviations**

<b>CNA</b> – Converged Network Adapter <b>Cu</b> – Copper Connector <b>FC</b> – Fibre Channel <b>FCP</b> – Fibre Channel Protocol <b>GbE</b> – Gigabit Ethernet <b>LC</b> – Lucent Connector	<b>NIC</b> – Network Interface Card <b>NVRAM</b> – Non-Volatile RAM <b>Op</b> – Optical (connector) <b>PAM</b> – Performance Acceleration Module <b>TOE</b> – TCP Offload Engine
---	--

Figure 5 N series SAS/SCSI and special-purpose adapter cards

Refer to Figure 1 and Figure 3 for appliance or gateway compatibility.

Figure 6 shows the schema of the currently available disk drive technologies and external disk shelves compatibility for the N series family. Here you can check which drives can be ordered and installed in the shelves and the FC speed that can be set up in the loop.

	Feat.Code	Capacity	RPM	EOA/EOS	Data ONTAP (min release)	Interface (Gb/Sec)			EXN Model	
						1	2	4	2000	4000
FIBRE CHANNEL	4006	300GB	15K	-	7.2.1 / 7.3 8.0 / 10.0.2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	4007	450GB	15K	-	7.2.5 / 7.3 8.0 / 10.0.4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	4017	600GB	15K	-	7.3.2 / 8.0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SAS	4015	300GB	15K	-	7.3.2 8.0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	SAS drives are not supported with the EXN4000
	4016	450GB	15K	-	7.3.2 8.0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	4017	600GB	15K	-	7.3.2 8.0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
SATA	4012	500GB	7.2K	-	7.0.1 / 7.1 7.2 / 7.3 8.0 / 10.0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	4018	500GB	7.2K	-	7.3.2 8.0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	4016	1TB	7.2K	-	7.2.3 / 7.3 8.0 / 10.0.3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	4020	1TB	7.2K	-	7.3.2 8.0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	4021	2TB	7.2K	-	7.3.2 8.0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	4021	2TB	7.2K	-	7.3.2 8.0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Figure 6 N series disk drive summary

Older (72 GB/10 K, 72 GB/15 K, 144 GB/10 K, 144 GB/15 K, 300 GB/10 K, 250 GB/7.2 K, 750 GB/7.2 K) drives are no longer available as new features and are not reported here.

In Figure 7 and Figure 8 we provide the essential technical specification needed to plan the selection and installation of the currently available external disk shelves (EXN1000/3000/4000) for adding capacity to the N series nodes.

Model	Feature Code	Weight	Disk	Rack	Power (Amps @100-120V)	Thermal (BTU/hr)	EOA/EOS	(min release)
EXN2000		Empty 50.06 lb. (23 kg) With Drives 77 lb. (35 kg)	14	3U	<b>10K RPM</b> 72GB: 3.43A 144GB: 3.43A 300GB: 3.89A <b>15K RPM</b> 72GB: 3.63A 144GB: 3.75A 300GB: 4.32A	<b>10K RPM</b> 72GB: 1,167 144GB: 1,167 300GB: 1,320 <b>15K RPM</b> 72GB: 1,234 144GB: 1,272 300GB: 1,470 450GB: 1,470	05.2008 06.2013	6.4.1 / 7.X 8.0 / 10.0
EXN4000	4006 (300GB drives) 4007 (450GB drives) 4008 (600GB drives)	Empty 50.06 lb. (23 kg) W/O Drives: 68 lb. (30.8 kg) With Drives 77 lb. (35 kg)	14	3U	<b>10K RPM</b> 72GB: 3.01A 144GB: 3.36A 300GB: 3.78A <b>15K RPM</b> 72GB: 3.65A 144GB: 3.45A 300GB: 4.27A 450GB: 4.27A 600GB: 4.27A	<b>10K RPM</b> 72GB: 1,020 144GB: 1,140 300GB: 1,287 <b>15K RPM</b> 72GB: 1,218 144GB: 1,174 300GB: 1,452 450GB: 1,452 600GB: 1,452	-	7.2.1 / 7.3 8.0 / 10.0.1
EXN1000	4012 (500GB drives) 4019 (750GB drives) 4016 (1TB drives) 4021 (2TB drives)	Empty 50.06 lb. (23 kg) W/O Drives: 68 lb. (30.8 kg) With Drives 77 lb. (35 kg)	14	3U	250GB: 2.72A 500GB: 2.99A 750GB: 3.22A 1000GB: 3.10A 2000GB: 3.10A	250GB: 923 500GB: 1,095 750GB: 1,050 1000GB: 1,050 2000GB: 1,050	-	6.5 / 7.X 8.0 / 10.0
EXN3000	4012 (300GB SAS) 4016 (450GB SAS) 4017 (600GB SAS) 4018 (500GB SATA) 4020 (1TB SATA) 4021 (2TB SATA)	Empty: 21.1 lb. (9.6 kg) W/O Drives: 53.7 lb. (24.4 kg) With Drives: 110 lb. (49.9 kg)	24	4U	<b>SAS</b> 300GB: 6.0A 450GB: 6.3A 600GB: 6.3A <b>SATA</b> 500GB: 4.4A 1000GB: 4.4A 2000GB: 4.4A	<b>SAS</b> 300GB: 2,048 450GB: 2,150 600GB: 2,150 <b>SATA</b> 500GB: 1,501 1000GB: 1,501 2000GB: 1,501	-	7.3.2 8.0

Figure 7 N series disk shelves

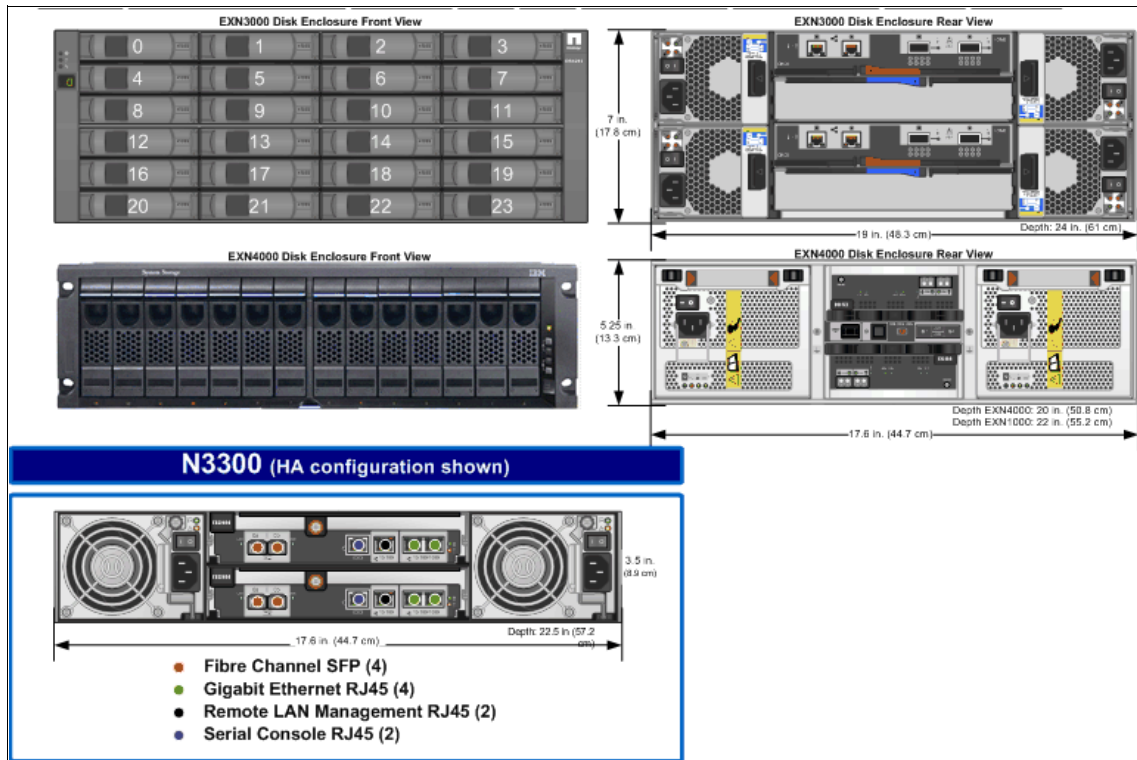


Figure 8 N3300 rear view



The rear view of the N3300 is added also. Refer to Figure 2 on page 3 for the other model rear views.

## The team who wrote this IBM Redpaper publication

This paper was produced by a team of specialists from around the world working at the International Technical Support Organization, San Jose Center.

**Alex Osuna** is a Project Leader at the International Technical Support Organization Tucson Center. He writes extensively on hardware and software storage. Before joining the ITSO four years ago, Alex was a Principal Systems Engineer with Tivoli®. Alex has over 31 years in the IT industry, specializing in storage for 21 of them. He holds certifications from Microsoft®, IBM, RedHat, and the Open Group.

**Sandro De Santis** is a Certified IT Specialist in Italy. He has 10 years of experience in the storage field. He holds a degree in Nuclear Engineering. His areas of expertise include enterprise disk, virtualization, and high-performance computing. He has written several papers on parallel sysplex, storage management, and business continuity.

Thanks to the following people for their contributions to this project: Kyle Burrell, Rucell Javier, Roland Tretau, Paolo Abbazia, Gabriele Vallone, Giuseppe Vita, Vidula Aijer, Peter Gray, Paola Pescione, and Emma Jacobs.

## Now you can become a published author, too!

Here's an opportunity to spotlight your skills, grow your career, and become a published author - all at the same time! Join an ITSO residency project and help write a book in your area of expertise, while honing your experience using leading-edge technologies. Your efforts will help to increase product acceptance and customer satisfaction, as you expand your network of technical contacts and relationships. Residencies run from two to six weeks in length, and you can participate either in person or as a remote resident working from your home base.

Find out more about the residency program, browse the residency index, and apply online at:

[ibm.com/redbooks/residencies.html](http://ibm.com/redbooks/residencies.html)

## Comments welcome

Your comments are important to us!

We want our papers to be as helpful as possible. Send us your comments about this paper or other IBM Redbooks® publications in one of the following ways:

- ▶ Use the online **Contact us** review Redbooks form found at:  
[ibm.com/redbooks](http://ibm.com/redbooks)
- ▶ Send your comments in an e-mail to:  
[redbooks@us.ibm.com](mailto:redbooks@us.ibm.com)
- ▶ Mail your comments to:  
IBM Corporation, International Technical Support Organization  
Dept. HYTD Mail Station P099  
2455 South Road  
Poughkeepsie, NY 12601-5400

## Stay connected to IBM Redbooks

- ▶ Find us on Facebook:  
<http://www.facebook.com/pages/IBM-Redbooks/178023492563?ref=ts>
- ▶ Follow us on twitter:  
<http://twitter.com/ibmredbooks>
- ▶ Look for us on LinkedIn:  
<http://www.linkedin.com/groups?home=&gid=2130806>
- ▶ Explore new Redbooks publications, residencies, and workshops with the IBM Redbooks weekly newsletter:  
<https://www.redbooks.ibm.com/Redbooks.nsf/subscribe?OpenForm>
- ▶ Stay current on recent Redbooks publications with RSS Feeds:  
<http://www.redbooks.ibm.com/rss.html>

# Notices

This information was developed for products and services offered in the U.S.A.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

*IBM Director of Licensing, IBM Corporation, North Castle Drive Armonk, NY 10504-1785 U.S.A.*

**The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:** INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

## **COPYRIGHT LICENSE:**

This information contains sample application programs in source language, which illustrates programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. You may copy, modify, and distribute these sample programs in any form without payment to IBM for the purposes of developing, using, marketing, or distributing application programs conforming to IBM's application programming interfaces.

**© Copyright International Business Machines Corporation 2010. All rights reserved.**

Note to U.S. Government Users Restricted Rights -- Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

This document REDP-4658-00 was created or updated on April 1, 2010.



Send us your comments in one of the following ways:

- ▶ Use the online **Contact us** review Redbooks form found at:  
[ibm.com/redbooks](http://ibm.com/redbooks)
- ▶ Send your comments in an email to:  
[redbook@us.ibm.com](mailto:redbook@us.ibm.com)
- ▶ Mail your comments to:  
IBM Corporation, International Technical Support Organization  
Dept. HYTD Mail Station P099, 2455 South Road  
Poughkeepsie, NY 12601-5400 U.S.A.




## Trademarks

IBM, the IBM logo, and [ibm.com](http://ibm.com) are trademarks or registered trademarks of International Business Machines Corporation in the United States, other countries, or both. These and other IBM trademarked terms are marked on their first occurrence in this information with the appropriate symbol (® or ™), indicating US registered or common law trademarks owned by IBM at the time this information was published. Such trademarks may also be registered or common law trademarks in other countries. A current list of IBM trademarks is available on the Web at <http://www.ibm.com/legal/copytrade.shtml>

The following terms are trademarks of the International Business Machines Corporation in the United States, other countries, or both:

IBM®  
Redbooks®

Redpaper™  
Redbooks (logo) ®

System Storage™  
Tivoli®

The following terms are trademarks of other companies:

Data ONTAP, and the NetApp logo are trademarks or registered trademarks of NetApp, Inc. in the U.S. and other countries.

Microsoft, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.